



Reduce process variability and drive plant efficiency

Process Instrumentation – Valves

se.com

Life Is On

Schneider
Electric

Overview

A single innovative field device can provide better process control and improve the performance of any one of your production assets: personnel, equipment, energy use, or inventory. Employing multiple instruments can positively impact the performance of all areas of your enterprise.

Schneider Electric field devices are allied with various industry-leading brands that result in systems, software, and services that dramatically improve your operations' economic, safety, and environmental performance. In addition, the deployment of multiple advanced measurement systems will enhance the availability and utilization of all the assets on which your success depends.

Description

No matter the application, Schneider Electric enables you to drive your process at its best. Our portfolio of general service and severe service valves cover today's toughest demands for valve performance.

General Service Control Valves

Whether at high pressures, in corrosive media, or subzero fluids, our family of plug valves reliably address the vast majority of requirements at low energy consumption through low torque designs.

Severe Service Control Valves

Longer service life and reduced cost of ownership are made possible through highly engineered anti-cavitation control valves that neutralize detrimental wear and tear. A range of material, pressure and temperature options maximize flexibility for severe service applications.

Ball Valves

Long life in tough applications, including corrosive fluids and cryogenics make our ball valves the hallmark of our valve portfolio. Customers world wide can fully customize the ball valves to international design and performance standards.

Butterfly Valves

Ideal for precision throttling and on-off applications, our butterfly valves provide performance and long-term value through low friction and small torque, bidirectional sealing, intrinsic fire-proof structure and dead zone free design.

SRD998 Valve Positioner

The intelligent positioner SRD998 is designed to operate pneumatic valve actuators. Enhanced functionalities enable a significant reduction in commissioning time and reduction of the total installation cost.

- Fast commissioning with user-friendly LCD, rotary selector and intuitive menu
- Full valve compatibility with improved control performance
- Seamless DCS integration based on HART® 7



Benefits

- Easy to Use
- Fast Commissioning
- User-Friendly
- Reliable and Robust

Applications

- Oil & Gas
- Water & Wastewater
- Mining, Metals & Minerals
- Power Generation
- Food & Beverage
- Severe Vibration & Temperature Applications


General Service Control Valves



Model	VTX10	VTX30	VTX50
Description	Quick Change Trim Single Seat Control Valve	Quick Change Trim Cage Control Valve	Pressure Balanced Cage Control Valve
Plug	Contoured Plug 	Drilled Hole Plug 	Drilled Hole Plug 
Size Range	1/2"-16"	1/2"-16"	3"-16"
Body Ratings	Class 150 - Class 300	Class 150 - Class 300	Class 600 - Class 1500
Cv value	Equal %	2.9-1463	29-3250
	Linear	4.7-2925	2.9-2925
Bonnet	-50°F – 986°F (-46°C - 530°C)	-50°F – 986°F (-46°C - 530°C)	-50°F – 986°F (-46°C - 530°C)
Flow Characteristics	Equal Percentage, Linear, Quick Opening	Equal Percentage, Linear	Equal Percentage, Linear
Shutoff Class	ANSI B16.104 Class IV, V, VI	ANSI B16.104 Class IV, V, VI	ANSI B16.104 Class IV, V
Materials	WCC, LCC, 316 SS, 304 SS, WC6, WC9	WCC, LCC, 316 SS, 304 SS, WC6, WC9	WCC, LCC, 316 SS, 304 SS, WC6, WC9
Packing	PTFE V-Ring, PTFE V-Ring Double, PTFE Filled, Grafoil/Graphite	PTFE V-Ring, PTFE V-Ring Double, PTFE Filled, Grafoil/Graphite	PTFE V-Ring, PTFE V-Ring Double, PTFE Filled, Grafoil/Graphite
Body Connections*	RF, RTJ, BW, SW	RF, RTJ, BW, SW	RF, RTJ, BW, SW
Actuator	Spring Diaphragm, Linear Piston, Electric	Spring Diaphragm, Linear Piston, Electric	Spring Diaphragm, Linear Piston, Electric

*DIN & PN flanges also available (contact your Schneider Electric representative for more information)

General Service Control Valves

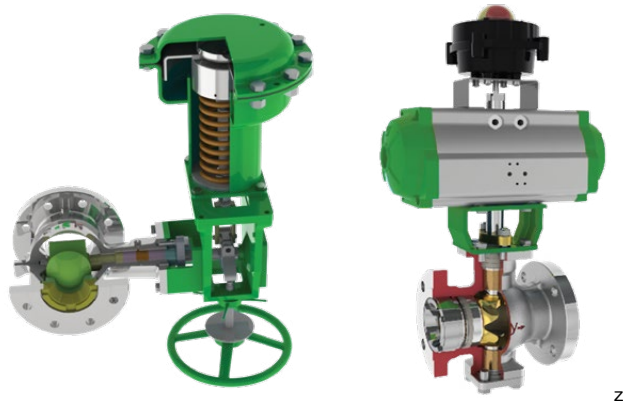



z

Model	VTX70	VTX90
Description	Rotary Eccentric Plug Control Valve	V-Ball Control Valve
Ball	Eccentric Plug	V-Ball
Body Size	1"-14"	1"-20"
Body Ratings	Class 150 - Class 600	Class 150 - Class 300
Calculated CV	5.6-2600	19-15210
Bonnet	-76°F - 660°F (-60°C - 350°C)	-20°F - 790°F (-29°C - 425°C)
Flow Characteristics	Modified Equal %	Modified Equal %
Leakage Class	ANSI B16.104 Class IV, V, VI	ANSI B16.104 Class IV, V, VI
Materials	WCC, LCC, 316 SS, 304 SS, WC6, WC9	WCC, LCC, 316 SS, 304 SS, WC6, WC9
Packing	PTFE V-Ring, PTFE V-Ring Double, PTFE Filled, Grafoil/Graphite	PTFE V-Ring, PTFE V-Ring Double, PTFE Filled, Grafoil/Graphite
Body Connections*	Wafer (RF), Flanged (RF)	Wafer (RF), Flanged (RF)
Actuator	Rack & Pinion, Scotch Yoke, Electric, Hydraulic	Rack & Pinion, Scotch Yoke, Electric, Hydraulic

*DIN & PN flanges also available (contact your Schneider Electric representative for more information)

Severe Service Control Valves



Model	MVR20	MVR40	
Description	Multistage Axial Flow Control Valve	Multipath and Multistage Control Valve	
Plug	Anti-Cavitation 	Labyrinth Disk Stack 	
Size Range	1"-3"	1"-12"	
Body Ratings	Class 900 - 2500	Class 150 - 2500	
Cv value	Equal %	Modified	Custom
	Linear	Modified	Custom
Bonnet	-20°F – 780°F (-30°C - 420°C)	-50°F – 986°F (-46°C - 530°C)	
Flow Characteristics	Modified Linear	Equal Percentage, Linear	
Shutoff Class	ANSI/FCI 70-2	MSS-SP-61	
Materials	A105, F11, F22	WCB, WC6, A105, F11	
Packing	PTFE V-Ring, PTFE V-Ring Double, PTFE Filled, Grafoil/Graphite	PTFE V-Ring, PTFE V-Ring Double, PTFE Filled, Grafoil/Graphite	
Body Connections*	RF, RTJ, BW, SW	RF, RTJ, BW, SW	
Actuator	Spring Diaphragm, Linear Piston, Electric	Spring Diaphragm, Linear Piston, Electric	

*DIN & PN flanges also available (contact your Schneider Electric representative for more information)

Ball Valves



Model	BAV90
Description	Two Piece, Flanged, Soft Seated, General Service Ball Valve
Ball	Full Port
Size Range	1/2"-24"
Body Ratings	Class 150 - Class 300
Calculated Cv	Full Port
Bonnet	-20°F - 390°F (-29°C - 200°C)
Flow Characteristics	Quick-Opening
Shutoff Class	API598 ANSI B16.104, Class VI
Materials	WCC, LCC, 316 SS, 304 SS, WC6, WC9
Packing	PTFE V-Ring, PTFE V-Ring Double, PTFE Filled, Grafoil/Graphite
Body Connections*	RF
Actuator	Rack & Pinion, Scotch Yoke, Electric, Hydraulic

*DIN & PN flanges also available (contact your Schneider Electric representative for more information)


Butterfly Valves



Model	TVT60	TVT80	TVT80-Cryo
Description	High Performance Butterfly Valve	Triple Offset Butterfly Valve	Triple Offset Butterfly Valve – Low Temperature
Disc	Double-Offset	Triple-Offset	Triple-Offset
Size Range	2"-32"	3"-56"	3"-32"
Body Rating	Class 150	Class 150 - Class 300	Class 150 - Class 300
Bonnet	-49°F - 925°F (-45°C - 500°C)	-49°F - 925°F (-45°C - 500°C)	-320°F - 85°F (-196°C - 29°C)
Flow Characteristics	Modified Equal %	Modified Equal %	Modified Equal %
Shutoff Class	Metal Seat - ANSI B16.104 IV Soft Seat - ANSI B16.104 VI	API598 ANSI B16.104 Class V	API598 ANSI B16.104 Class V
Material	WCC, LCC, 316 SS, 304 SS, WC6, WC9	WCC, LCC, 316 SS, 304 SS, WC6, WC9	304 SS, 316 SS, WCB
Packing	PTFE V-Ring, PTFE V-Ring Double, PTFE Filled, Grafoil/Graphite	PTFE V-Ring, PTFE V-Ring Double, PTFE Filled, Grafoil/Graphite	PTFE V-Ring, PTFE V-Ring Double, PTFE Filled, Grafoil/Graphite
Body Connections*	2"-32" Wafer (RF) 2"-24" Flanged (RF)	Wafer (RF), Flanged (RF)	Wafer (RF), Flanged (RF)
Actuator	Rack & Pinion, Scotch Yoke, Electric, Hydraulic	Rack & Pinion, Scotch Yoke, Electric, Hydraulic	Rack & Pinion, Scotch Yoke, Electric, Hydraulic


*DIN & PN flanges also available (contact your Schneider Electric representative for more information)

Actuation

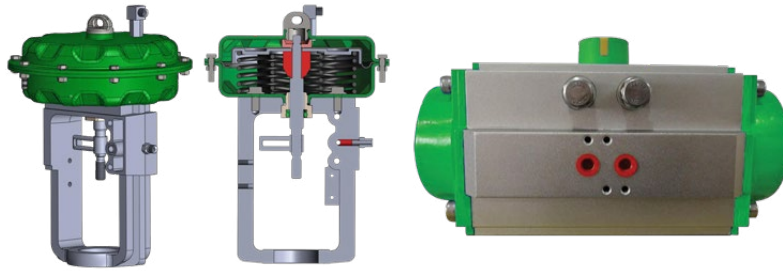

Model	ASP	APR
Description	Multi-Spring and Diaphragm Actuator	Pneumatic Rack and Pinion Actuator
Performance	<p>Hysteresis Less than 1% of Full Stroke w/ Positioner Less than 3% of Stroke w/out Positioner</p> <p>Linearity Less than 1% of Full Stroke w/ Positioner Less than 5% of Full Stroke w/out Positioner</p>	90% Torque Transmission Efficiency of Rack and Pinion, Quick-Acting, NAMUR and ISO Mounting
Function	Double-Acting, Spring-Return, Fail-Safe	Double-Acting, Spring-Return, Fail-Safe
Accessories	I/P Positioner, PP Positioner, Limit Switch, Solenoid Valve, Speed Controller, Filter Regulator	I/P Positioner, PP Positioner, Limit Switch, Solenoid Valve, Speed Controller, Filter Regulator
Options	Manual Handwheel, Low-Temp Service, High-Temp Service	Manual Handwheel, Low-Temp Service, High-Temp Service
Materials	<p>Diaphragm Case: Carbon Steel</p> <p>Diaphragm: NBR</p> <p>Shaft: 304L SS</p> <p>Yoke: Ductile Iron</p>	<p>Body: Extruded Aluminum</p> <p>End-Cap: Die-Cast Aluminum</p> <p>Piston: Die-Cast Aluminum</p> <p>Pinion: Alloy Steel</p> <p>Piston Bearing: PTFE/PTFE-Bronze</p> <p>Piston Guide: Nylon</p>

Life Is On



[se.com](https://www.se.com)

Schneider Electric
38 Neponset Avenue
Foxboro, MA 02035
Toll free: 1-866-746-6477
Global: +1-508-549-2424

© 2020 Schneider Electric. All Rights Reserved. Life Is On | Schneider Electric is a trademark and the property of Schneider Electric SE, its subsidiaries and affiliated companies. Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material. 998-20817537